


Expand your control options.

Designed to provide infrared expansion when used with Pro Control processors, the Pro.ircb.4 IR Emitter Connecting Block has one infrared signal input and four output ports for up to four single IR emitters. It is ideal for adding emitters to a ProLink processor without adding another power supply or active device.

Key Features

- Compatible with most industry-standard single IR emitters
- 4 IR emitter output ports
- Sturdy steel construction
- Designed to function with no additional power supply
- A 3" mono 3.5 mm cable is provided for connection to ProLink processors
- Surface mount or free standing

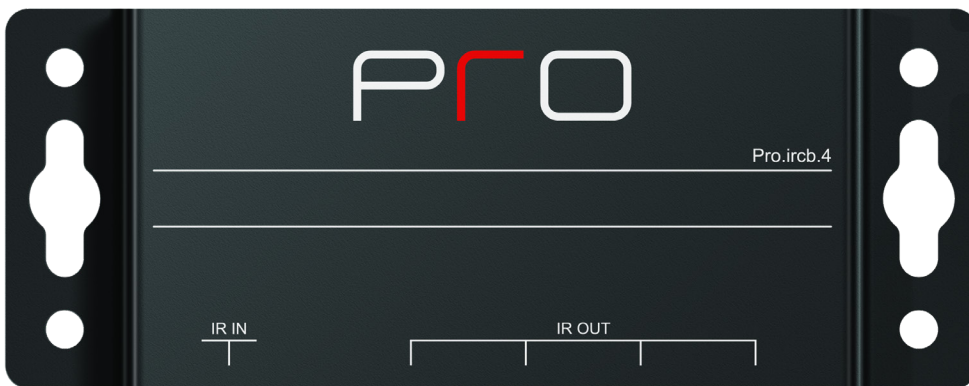

SPECIFICATIONS

Power	No additional power option
Number of IR outputs	Four 3.5mm jacks for industry-standard IR emitters
Enclosure	Formed steel, black powder coating
Infrared input	Compatible w/ industry-standard repeaters/receivers
Infrared frequency transmission range	15 kHz – 460 kHz
Mounting	Surface-mount or free standing
Dimensions W x H x D	5.25" x 1.0" x 2.0" (133.3mm x 25.4mm x 50.8mm)
Warranty	1 Year (parts & labor)